

**DAESUNG
STEEL**






DAESUNG STEEL CO.,LTD.

끊임없는 기술개발과 변화로

한걸음 앞서가는 기업

(주)대성철강

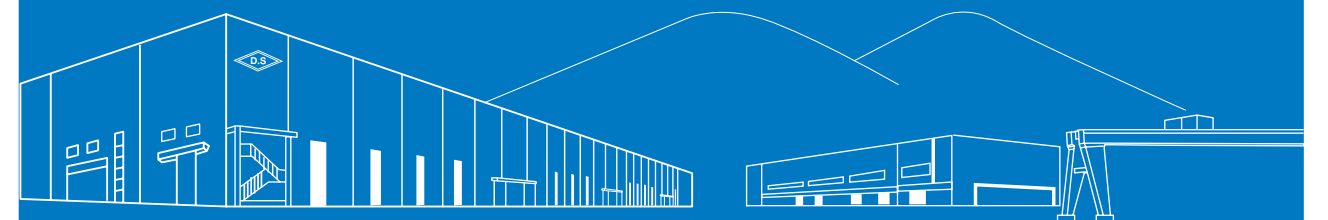

www.bestdss.co.kr



GREETING

“기술개발”과 “고객만족”을
최대 목표로 철강산업의
무한한 가능성에 도전하는
21세기 최고의 회사가
되겠습니다.

대성철강은 1978년 창업 이래 철강 한 분야에만 매진하며 지속적인
성장을 거듭 해 왔습니다. 대성철강의 성장에는 다음과 같은 세가지
경영이념을 꾸준히 지켜왔기에 가능했습니다.

- **고객만족** – 상호이익을 위한 비즈니스 파트너십(partnership)유지
– 최상의 제품(top quality product)생산
- **직원복지향상**
- **투명한 경영**

이러한 경영이념과 더불어 끊임없이 기술개발에 정진해온 대성철강은 머지않은
창립 40주년을 맞아 세계속의 기업으로 거듭나고자 합니다. 이를 위해 해외
영업망을 보다 확충하고 굴지의 다국적 철강기업들과의 협력을 강화하고자 합니다.
마지막으로, 대성철강은 고객만족, 직원복지 그리고 투명 경영이라는 세 분야에서
최고의 기업이 되도록 노력을 멈추지 않을 것이며, 나아가 인류의 풍요로운 삶을
창조하는데 헌신하는 기업이 될 것을 약속드립니다.

대표이사 | 박상현

Established in 1978, **Daesung Steel** has been growing steadily specializing
in steel business for decades.

The company has been thriving under the principle of;

- **Customer Satisfaction**
 - maintaining business partnership for mutual propriety
 - producing top quality products
- **Higher standards in employee's welfare**
- **Transparent management**

Committed to these guiging ideas, Daesung aims to expand the business territory reinvigorating its overseas
business network and collaborating with global steel companies to mark the upcoming 40~year anniversary
of the company's endeavor toward fulfilling its business principles and advancement in technology.
With a solemn promise of greater customer satisfaction, employee welfare, and transparency in management.
Daesung Steel will continue its pursuit of encellence that will ultimately enrich the life of all.

CEO | Sanghyun Park

창업기

- 1978. 09. 주식회사 대성철강 설립
- 1982. 11. 수출의 날 국무총리 표창
- 1985. 07. K.S 업체 규격획득
- 1987. 11. 500만불 수출탑 수상
- 1988. 11. 1,000만불 수출탑 수상


안정기

- 1991. 03. 부산 감전공장 시설 자동화
- 1998. 03. 사이드링 개발
- 1998. 04. 미니슈 개발
- 1998. 11. 자본금 총계 50억 8천만원
- 2002. 01. 다대공장 설립
- 2008. 01. 김해시 진영하치장 설립

도약기

- 2010. 11. 광양국가산업단지 토지매입
- 2013. 04. ISO9001 인증 획득
- 2014. 03. 광양공장 건설 착공식
- 2014. 08. 포스코 지분투자 유치
- 2015. 04. 광양공장 완공

제조공정도 Manufacturing Process

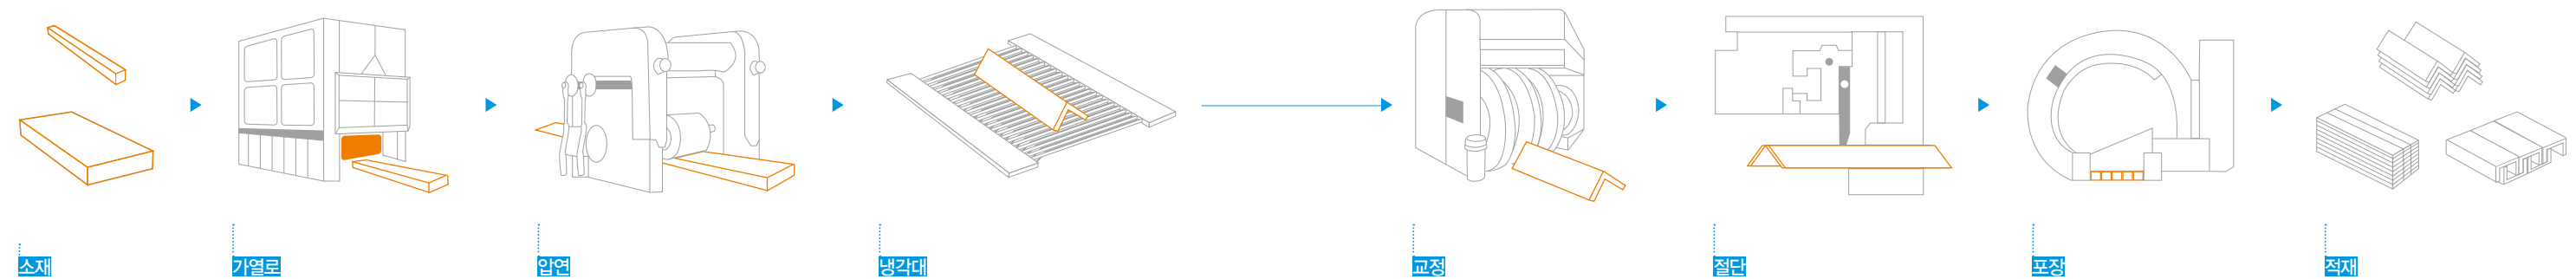





생산제품


- 등변 앵글
- 부등변 앵글
- 찬넬
- 평철
- 원형강
- 반환봉
- 사각강
- 육각강
- 그레이팅
 - 아이바
 - 그레이팅 평철
 - 톱니 평철
 - 톱니 아이바
- 프로파일
- 나사봉강
- 이형봉강
- 트랙슈
- 승강기 가이드 레일

제품소개

제품소개

등변 앵글

Equal Angles

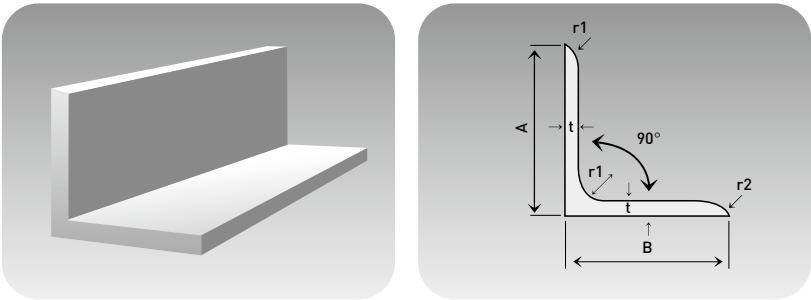


등변 앵글 규격(Specification of Equal Angles)

표준치수 Standard Sectional Dimension (mm)				단면적 Sectional Area (cm²)	단위무게 Unit Weight (kg/m)	중심의 위치 Center of Gravity (cm)	단면2차 모멘트 Moment of Inertia (cm⁴)			단면2차 반지름 Radius of Gyration (cm)			단면계수 Modulus of Section (cm³)
AxB	t	r1	r2			Cx. Cy	Ix. Iy	max. Iu	min. Iv	ix. iy	max. iu	min. iv	Zx. Zy
40x40	5.0	4.5	3.0	3.755	2.95	1.17	5.42	8.59	2.25	1.20	1.51	0.774	1.91
50x50	4.0	6.5	3.0	3.892	3.06	1.37	9.06	14.40	3.76	1.53	1.92	0.983	2.49
50x50	6.0	6.5	4.5	5.644	4.43	1.44	12.60	20.00	5.23	1.50	1.88	0.963	3.55
65x65	6.0	8.5	4.0	7.527	5.91	1.81	29.40	46.60	12.20	1.98	2.49	1.27	6.26
65x65	8.0	8.5	6.0	9.761	7.66	1.88	36.80	58.30	15.30	1.94	2.44	1.25	7.96
75x75	6.0	8.5	4.0	8.727	6.85	2.06	46.10	73.20	19.00	2.30	2.90	1.48	8.47
75x75	9.0	8.5	6.0	12.69	9.96	2.17	64.40	102.00	26.70	2.25	2.84	1.45	12.10
75x75	12.0	8.5	6.0	16.56	13.0	2.29	81.90	129.00	34.50	2.22	2.79	1.44	15.70
90x90	7.0	10.0	5.0	12.22	9.59	2.46	93.00	148.00	38.30	2.76	3.48	1.77	14.20
90x90	10.0	10.0	7.0	17.00	13.3	2.57	125.00	199.00	51.70	2.71	3.42	1.74	19.50
90x90	13.0	10.0	7.0	21.71	17.0	2.69	156.00	248.00	65.30	2.68	3.38	1.73	24.80
100x100	7.0	10.0	5.0	13.62	10.7	2.71	129.00	205.00	53.20	3.08	3.88	1.98	17.70
100x100	10.0	10.0	7.0	19.00	14.9	2.82	175.00	278.00	72.00	3.04	3.83	1.95	24.40
100x100	13.0	10.0	7.0	24.31	19.1	2.94	220.00	348.00	91.10	3.00	3.78	1.94	31.10
130x130	9.0	12.0	6.0	22.74	17.9	3.53	366.00	583.00	150.00	4.01	5.06	2.57	38.70
130x130	12.0	12.0	8.5	29.76	23.4	3.64	467.00	743.00	192.00	3.96	5.00	2.54	49.90
130x130	15.0	12.0	8.5	36.75	28.8	3.76	568.00	902.00	234.00	3.93	4.95	2.53	61.50
150x150	12.0	14.0	7.0	34.77	27.3	4.14	740.00	1,180.00	304.00	4.61	5.82	2.96	68.10
150x150	15.0	14.0	10.0	42.74	33.6	4.24	888.00	1,410.00	365.00	4.56	5.75	2.92	82.60

부등변 앵글

Unequal Angles

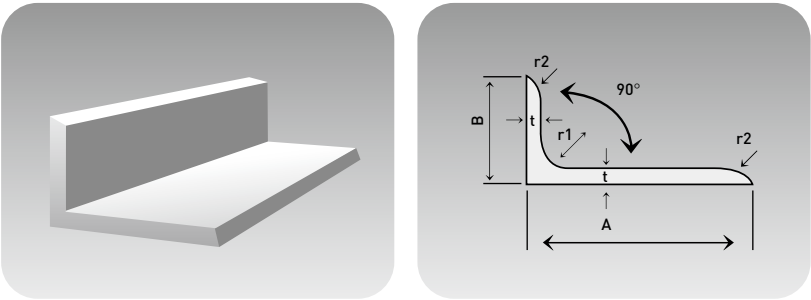


부등변 앵글 규격(Specification of Unequal Angles)

표준치수 Standard Sectional Dimension (mm)				단면적 Sectional Area (cm²)	단위무게 Unit Weight (kg/m)	중심의 위치 Center of Gravity (cm)		단면2차 모멘트 Moment of Inertia (cm⁴)				단면2차 반지름 Radius of Gyration (cm)				Tan α	단면계수 Modulus of Section (cm³)	
AxB	t	r1	r2			Cx	Cy	Ix	Iy	max. Im	min. Iv	ix	iy	max. im	min. iv		Zx	Zy
100x75	7.0	10.0	5.0	11.87	9.32	3.06	1.83	118	56.9	144	30.8	3.15	2.19	3.49	1.61	0.584	17.0	10.0
100x75	10.0	10.0	7.0	16.50	13.0	3.18	1.94	159	76.1	194	41.3	3.11	2.15	3.43	1.58	0.543	23.3	13.7
125x75	7.0	10.0	5.0	13.62	10.7	4.10	1.64	219	60.4	243	36.4	4.01	2.11	4.23	1.64	0.362	26.1	10.3
125x75	10.0	10.0	7.0	19	14.9	4.23	1.75	299	80.8	330	49	3.96	2.06	4.17	1.61	0.357	36.1	14.1
125x75	13.0	10.0	7.0	24.31	19.1	4.35	1.87	376	101	415	61.9	3.93	2.04	4.13	1.6	0.352	46.1	17.9
150x90	9.0	12.0	6.0	20.94	16.4	4.95	1.99	485	133	537	80.4	4.81	2.52	5.06	1.96	0.361	48.06	19
150x90	12.0	12.0	8.5	27.36	21.5	5.07	2.1	619	167	685	102	4.76	2.47	5	1.93	0.357	2.3	24.3

канал

Channels

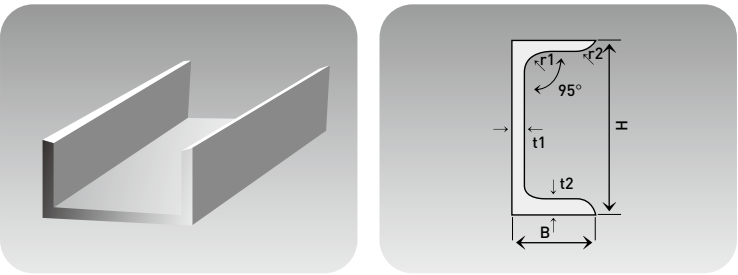

канал 규격(Specification of Channels)


표준치수 Standard Sectional Dimension (mm)					단면적 Sectional Area (cm²)	단위무게 Unit Weight (kg/m)	중심의 위치 Center of Gravity (cm)		단면2차 모멘트 Moment of Inertia (cm⁴)		단면2차 반지름 Radius of Gyration (cm)		단면계수 Modulus of Section (cm³)	
HxB	t1	t2	r1	r2			Cx	Cy	Ix	Iy	ix	iy	Zx	Zy
75x40	5.0	7.0	8.0	4.0	8.818	6.92	0	1.28	75.3	12.2	2.92	1.17	20.1	4.47
100x50	5.0	7.5	8.0	4.0	11.92	9.36	0	1.54	188	26.0	3.97	1.48	37.6	7.52
125x65	6.0	8.0	8.0	4.0	17.11	13.4	0	1.90	424	61.8	4.98	1.90	67.8	13.4
150x75	6.5	10.0	10.0	5.0	23.71	18.6	0	2.28	861	117	6.03	2.22	115	22.4

제품소개

제품소개

평철

Flat Bars

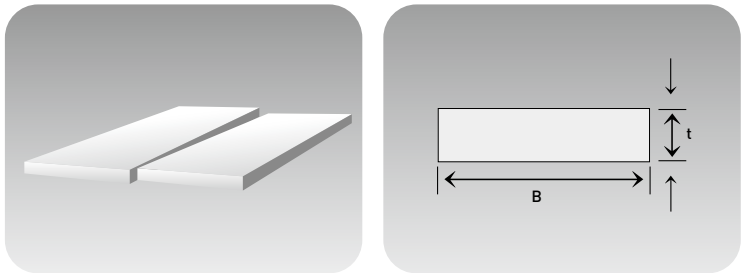

평철 규격(Specification of Flat Bars)

표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)	표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)
txB			txB		
3x19	0.5700	0.477	9x38	3.420	2.68
3x25	0.7500	0.589	9x44	3.960	3.11
3x32	0.9600	0.754	9x50	4.500	3.53
3x38	1.140	0.895	9x65	5.850	4.59
3x50	1.500	1.18	9x75	6.750	5.30
4.5x25	1.125	0.883	9x90	8.100	6.36
4.5x32	1.440	1.13	9x100	9.000	7.06
4.5x38	1.710	1.34	9x150	13.50	10.6
4.5x44	1.980	1.55	9x180	16.20	12.7
4.5x50	2.250	1.77	9x200	18.00	14.1
4.5x75	3.375	2.65	12x32	3.840	3.01
4.5x100	4.500	3.53	12x38	4.560	3.58
6x25	1.500	1.18	12x50	6.000	4.71
6x32	1.920	1.51	12x65	7.800	6.12
6x38	2.280	1.79	12x75	9.000	7.06
6x50	3.000	2.36	12x90	10.80	8.48
6x65	3.900	3.06	12x100	12.00	9.42
6x75	4.500	3.53	12x125	15.00	11.8
6x90	5.400	4.24	12x150	18.00	14.1
6x100	6.000	4.71	12x180	21.60	17.0
6x125	7.500	5.89	12x200	24.00	18.8
6x150	9.000	7.06	16x32	5.120	4.02
9x25	2.250	1.77	16x38	6.080	4.77
9x32	2.880	2.26	16x50	8.000	6.28


평철 규격(Specification of Flat Bars)

표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)	표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)
txB			txB		
16x65	10.40	8.16	22x75	16.50	13.0
16x75	12.00	9.42	22x100	22.00	17.3
16x100	16.00	12.6	22x125	27.50	21.6
16x125	20.00	15.7	22x180	39.60	31.1
16x150	24.00	18.8	22x200	44.00	34.5
16x180	28.80	22.6	25x50	12.50	9.81
16x200	32.00	25.1	25x75	18.75	14.7
19x38	7.220	5.67	25x125	31.25	24.5
19x50	9.500	7.46	25x150	37.50	29.4
19x65	12.35	9.69	25x180	45.00	35.3
19x75	14.25	11.2	25x200	50.00	39.2
19x90	17.10	13.4	28x75	21.00	16.5
19x100	19.00	14.9	28x90	25.20	19.8
19x125	23.75	18.6	28x100	28.00	22.0
19x150	28.50	22.4	28x125	35.00	27.5
19x180	34.20	26.8	28x200	56.00	44.0
19x200	38.00	29.8	32x150	48.00	37.7
22x50	11.00	8.64	32x180	57.60	45.2
22x65	14.30	11.2	32x200	64.00	50.2

제품소개

원형강

Round Bars

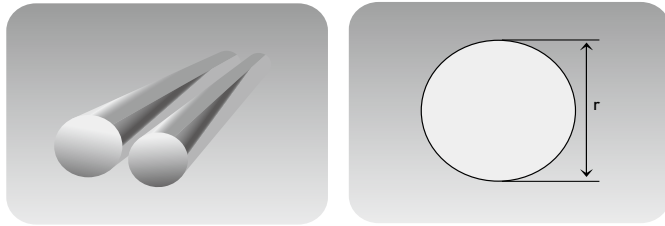


원형강 규격(Specification of Round Bars)

표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)
r		
9	0.6362	0.499
12	1.131	0.888
16	2.011	1.58
19	2.835	2.23
20	3.142	2.47
22	3.801	2.98
25	4.909	3.85
29	6.602	5.18
32	8.042	6.31
36	10.18	7.99
38	11.34	8.90
42	13.85	10.9
46	16.62	13.0
50	19.64	15.4
55	23.76	18.7
60	28.27	22.2

반환봉

Half Round Bars

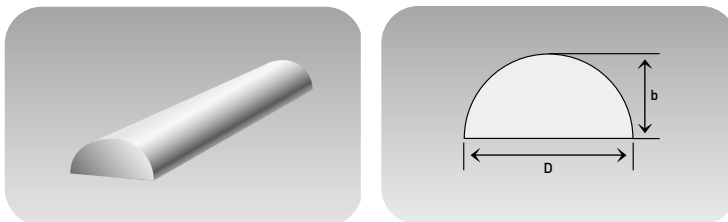

반환봉 규격(Specification of Half Round Bars)

표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)
Dxb		
60x30	1,413.717	11.1
75x37.5	2,208.932	17.3

사각강

Square Bars




사각강 규격(Specification of Square Bars)

표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)
AxB		
12x12	1.440	1.13
16x16	2.56	2.01
19x19	3.61	2.83
22x22	4.84	3.80
25x25	6.25	4.91
32x32	10.24	8.04
38x38	14.44	11.3
44x44	19.36	15.2
50x50	25.0	19.6
55x55	30.25	23.7
60x60	36.00	28.3

육각강

Hexagonal Bars

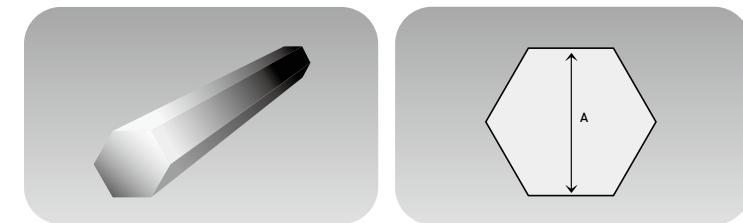

육각강 규격(Specification of Hexagonal Bars)


표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)	표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)
A			A		
19	3.126	2.45	34	10.014	7.86
21	3.819	3.00	35	10.61	8.33
22	4.192	3.29	38	12.21	9.82
23	4.581	3.60	41	14.56	11.4
25	5.413	4.28	46	18.33	14.4
26	5.854	4.60	50	21.65	17.0
28	6.790	5.33	54	25.25	19.8
29	7.283	5.72	58	29.13	22.9
32	8.868	6.96			

제품소개

제품소개

아이바

I-Bars

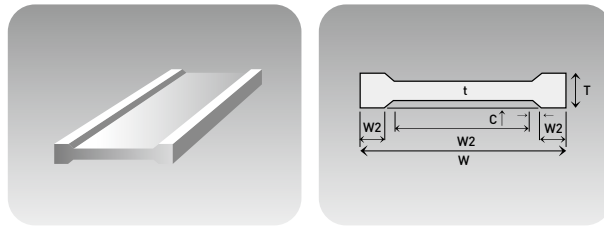


I-Bar 규격(Specification of I-Bars)

표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)	표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm ²)	단위무게 Unit Weight (kg/m)
TtxW			TtxW		
5x3x25	0.950	0.746	7x4x50	2.530	1.986
5x3x32	1.220	0.958	7x4x55	2.751	2.160
5x3x38	1.439	1.130	7x4x60	3.045	2.390
5x3x44	1.656	1.300	7x4x65	3.248	2.550
5x3x50	1.924	1.510	7x4x75	3.651	2.860

그레이팅
평철

Grating Flat Bars

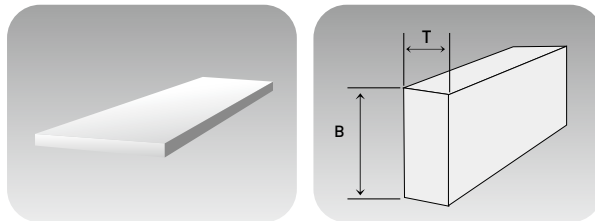


그레이팅 평철 규격(Specification of Grating Flat Bars)

표준치수 Standard Sectional Dimension (mm)	단위무게 Unit Weight (kg/m)	단면2차 모멘트 Moment of Inertia (cm ⁴)
TxB		
5x25	0.98	0.651
5x32	1.26	1.365
5x38	1.49	2.286
5x44	1.72	3.549
5x50	1.97	5.208

톱니 평철

Serrated Flat Bars

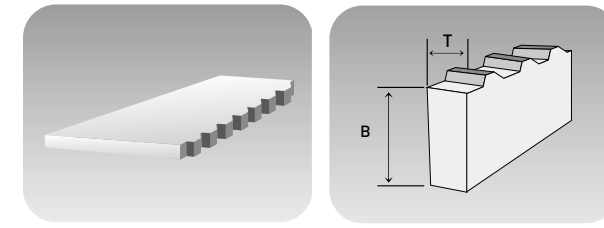


톱니 평철 규격(Specification of Serrated Flat Bars)

표준치수 Standard Sectional Dimension (mm)	단위무게 Unit Weight (kg/m)	단면2차 모멘트 Moment of Inertia (cm ⁴)
TxB		
5x25	0.98	0.651
5x32	1.26	1.365
5x38	1.49	2.286
5x44	1.72	3.549
5x50	1.97	5.208

톱니 아이바

Serrated I-Bars

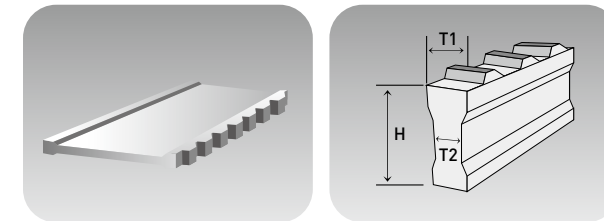

톱니 아이바 규격(Specification of Serrated I-Bars)


표준치수 Standard Sectional Dimension (mm)	단위무게 Unit Weight (kg/m)	단면2차 모멘트 Moment of Inertia (cm ⁴)
T1xT2xB		
5x3x25	0.746	0.950
5x3x32	0.96	1.251
5x3x38	1.13	2.083
5x3x44	1.30	3.221
5x3x50	1.43	4.609
7x4x50	1.99	6.432

제품소개

제품소개

프로파일

Profiles

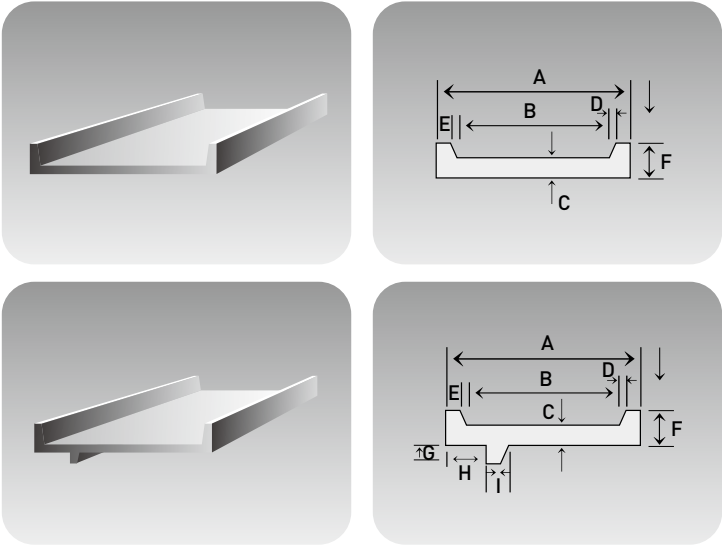


프로파일 규격(Specification of Profiles)

구분		A	B	C	D	E	F	G	H	I	단위무게 Unit Weight (kg/m)
프로파일 C형 (profile-C)	기준치 Standard	63.5	47.5	3.8	1.0	7.0	7.8	-	-	-	2.36
	허용치(mm) Permitted Limit	±0.3	±0.3	±0.2	±0.2	±0.2	±0.3	-	-	-	±5.0%
프로파일 F형 (profile-F)	기준치 Standard	63.5	49.5	4.0	1.0	4.0	8.0	6.0	12.7	3.0	2.56
	허용치(mm) Permitted Limit	±0.4	±0.4	±0.3	±0.2	±0.2	±0.3	±0.3	±0.3~ -0.4	±0.3	±5.0%

나사봉강

Rock Bolts

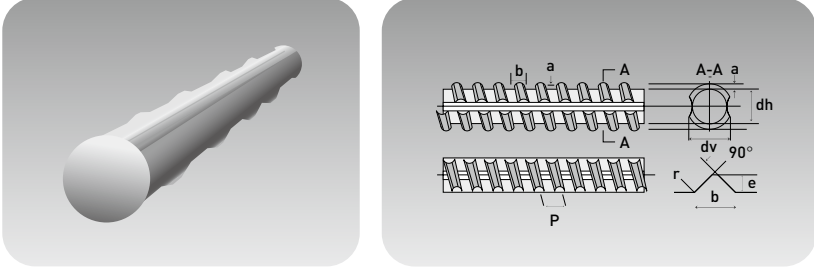

화학성분 및 기계적 성질(Chemical Composition & Mechanical Properties)

종류 Kind	화학성분 Chemical Composition(%)						항복점 yP (N/mm²)	인장강도 Tensile Strength (N/mm)	시험편 Test Piece	[%]	굴곡시험 Bending Test	
											각도 Angle	직경 Diameter
열간압연 Hot Mill 이형봉강 3중	SD350	0.270 ↓	1.600 ↓	0.050 ↓	0.050 ↓	0.50 ↓	350↑	490↑	3중	18↑ 20↑	180°	D41↓~4D D41↓~4D
열간압연 Hot Mill 이형봉강 3중	SD400	0.290 ↓	1.800 ↓	0.050 ↓	0.050 ↓	0.055 ↓	400↑	560↑	3중	16↑ 18↑	180°	5D

나사봉강 규격(Specification of Rock Bolts)


표준치수 Standard Sectional Dimension (mm)	단면적 Sectional Area (cm²)	단위무게 Unit Weight (kg/m)	표준지름 Diameter (cm)	지름 Diameter		지름 Screw High a(mm)	나사바닥폭 Screw Down Wide b(mm)
				dh(mm)	dh(mm)		
19	2.865	2.25	19.1	18.7	18.7	1.5	4.9
22	3.871	3.04	22.2	21.6	21.6	1.7	5.6
25	5.067	3.98	25.4	24.5	24.5	2.0	6.5
29	6.424	5.04	28.6	27.6	27.6	2.1	7.1
32	7.942	6.23	31.8	30.4	30.4	2.4	8.0
35	9.566	7.51	34.9	33.4	33.4	2.8	8.7

제품소개

제품소개

이형봉강

Deformed Bars

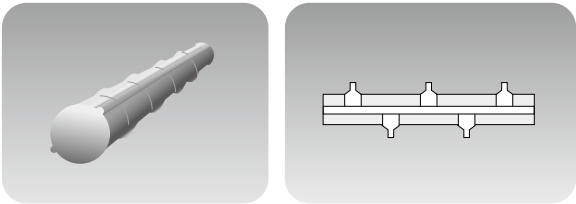


이형봉강 규격(Specification of Deformed Bars)

표준치수 Standard Sectional Dimension	단위무게 Unit Weight (kg/m)	공칭지름 Diameter (mm)	공칭단면적 Cross Sectional Area (cm²)	공칭둘레 Perimeter (cm²)	마디의 평균 간격의 최대치 Max. Average Spacing (mm)	마디의 높이		마디들 합계의 최대치 maximum Total Gaps to Knots (mm)
						최소치 Minimum value (mm)	최대치 Maximum value (mm)	
10	0.560	9.53	0.7133	3.0	6.7	0.4	0.8	7.5
13	0.995	12.7	1.267	4.0	8.9	0.5	1.0	10.0
16	1.56	15.9	1.986	5.0	11.1	0.7	1.4	12.5
19	2.25	19.1	2.865	6.0	13.4	1.0	2.0	15.0
22	3.04	22.2	3.871	7.0	15.5	1.1	2.2	17.5
25	3.98	25.4	5.067	8.0	17.8	1.3	2.6	20.0
29	5.04	28.6	6.424	9.0	20.0	1.4	2.8	22.5
32	6.23	31.8	7.942	10.0	22.3	1.6	3.2	25.0
35	7.51	34.9	9.566	11.0	24.4	1.7	3.4	27.5
38	8.95	38.1	11.40	12.0	26.7	1.9	3.8	30.0
41	10.5	41.3	13.40	13.0	28.9	2.1	4.2	32.5
51	15.9	50.8	20.27	16.0	35.6	2.5	5.0	40.0

트랙슈

Track Shoes

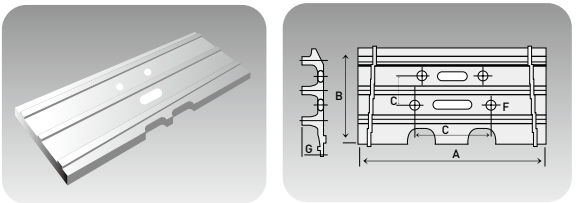


트랙슈 규격(Specification of Track Shoes)

두께 Thickness	폭 Width(A)			품목코드 Description Code	표준단면치수 Dimensions					적용 출간 거리 Applied Link Pitch	단면적 Sectional Area(mm²)
					B	C	D	F	G		
6.0	380	-	500	13TA060	154.0	94.0	46.0	15.0	14.0	135.0	1388.7
	450			15TA060	165.0	89.0	57.0	8.0	20.0	154.0	1792.9
8.0	500	-	750	17RA080	198.9	108.0	60.3	0.0	25.0	171.5	2903.4
	500			17TB080	190.0	107.9	60.3	0.0	20.0	171.5	2353.8
	500	600		19TB080	219.0	155.6	69.0	18.0	26.0	190.0	3192.5
8.5	500	700	800	19TB085	219.0	155.6	69.0	18.0	26.0	190.0	3302.0
9.0	500	-	900	17TA090	198.9	108.0	60.3	0.0	25.0	171.1	3126.8
9.5	500	-	900	17TC095	190.0	107.9	60.3	0.0	20.0	171.5	2677.0

승강기
가이드
레일

Elevator
Guide Rails

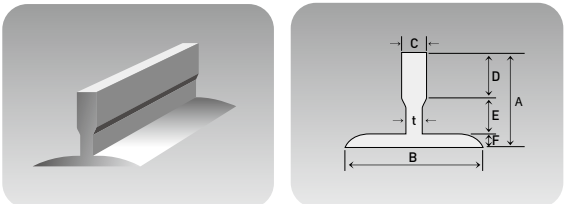

승강기 가이드 레일 규격(Specification of Elevator Guide Rails)

1) 소재

종류	표준 길이	Size(mm)							단면적 Sectional Area (cm²)	단위무게 Unit Weight (kg/m)	비고
		A	B	C	D	E	F	t			
8kg	5010	58.0	78.0	13.0	28.0	21.5	8.5	7.0	10.9	8.56	
13kg	5010	63.5	89.0	19.0	33.0	19.0	11.5	9.5	16.7	13.1	
18kg	5010	90.5	114.0	19.0	39.5	40.0	11.0	9.5	22.3	17.5	
24kg	5010	90.5	127.0	19.0	51.5	23.0	16.5	9.5	30.2	23.7	

2) 기계가공품

종류	표준 길이	중량 (kg/本)	중심위치		사상후 단면적 (cm²)	단면2차 모멘트 Moment of Inertia (cm⁴)		단면2차 반지름 Radius of Gyration (cm)		단면계수 Modulus of Section (cm³)	
			C (cm)	E (cm)		Ix	Iy	ix	iy	Zx	Zy
8kg	5000	42.8	1.65	3.95	9.84	29.90	26.10	1.74	1.63	7.560	6.710
13kg	5000	65.6	2.03	4.17	15.4	13.10	50.40	1.96	1.81	14.30	11.30
18kg	5000	87.7	2.87	6.02	20.9	17.50	109.0	2.93	2.29	29.70	19.10
24kg	5000	119.0	2.48	6.41	28.4	23.70	227.0	2.65	2.83	31.10	35.70

DAESUNG STEEL CO.,LTD.

공장 | 부산, 광양
영업소 | 부산, 서울
하치장 | 부산 다대포, 진영

부산공장(본사)

부산광역시 사상구 낙동대로 853(감전동)
TEL. 051-316-3221 FAX. 051-323-3195



광양공장

전라남도 광양시 명당2길 59(태인동)
TEL. 061-793-3221 FAX. 061-795-3221




서울 영업소

서울특별시 양천구 목동동로 293 현대41타워 1101호(목동)
TEL. 02-2642-3712 FAX. 02-2642-3735



다대 하치장

부산광역시 사하구 다산로 60(다대동)
TEL. 051-264-1555 FAX. 051-265-7897

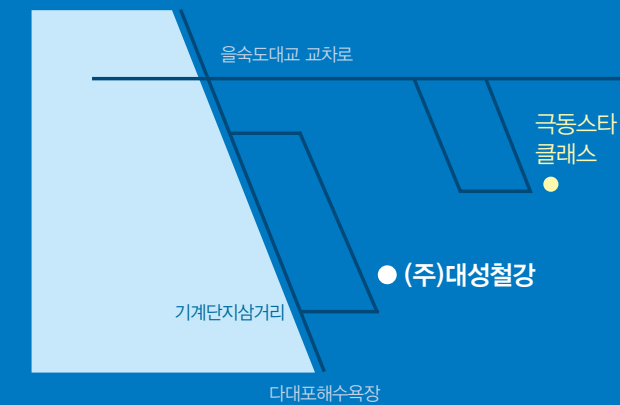

진영 하치장

경상남도 김해시 진영읍 서부로 74(내룡리)

